iePass FIDO

MFi Certified
FIDO Security Key

Apple Lightning & USB Type-C,
Dual-interface

CC EAL 6+ Secure Element

FIDO2 Certified

MFi Certified

FIDO U2F, FIDO2 / WebAuthn, OTP Supported

PIV, OpenPGP Supported

RoHS

JCOS Based

Supports iOS, Android,
Windows, Linux, macOS, Chrome OS

Made for iPhone | iPad | iPod

fido CERTIFIED FIDO2

FEITIAN
WE BUILD SECURITY

iePass FIDO is your Apple device companion developed by FEITIAN, enables user's authentication via Apple Lightning Connector to iOS devices or USB-C to Macs. It is also a multi-interface, multi-functional FIDO Certified authenticator supporting secure cross platform authentication for Android devices, PCs and laptops.

iePass FIDO makes use of high performance secure element with CC EAL6+ Certification, all credentials are stored securely inside the secure element and protected. The chip itself can protect data against certain level of physical attacks. With the deployment of FIDO standard, iePass FIDO provides user a secure authentication against phishing and MITM attacks.

Dual-Interface design

iePass FIDO Security Key is MFi certified which provides user to authentication via the lightning connection to iOS devices.

User can also achieve authentication on Android devices, PC and laptops using the embedded USB-C port.

For PCs and laptops without USB-A, users can choose to USB-C to USB-A adapter for authentication.

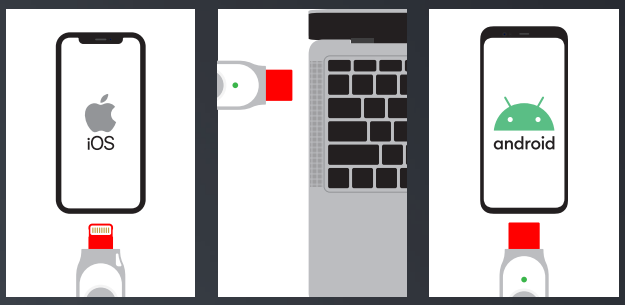

Multiple Security Functions

iePass FIDO Security Key supports different communication protocols such as U2F, FIDO2 / WebAuthn, OTP and CCID to provide support for different using scenario. The iePass FIDO Security Key also have PIV and OpenPGP supported to perform digital signature and mail encryption within one single security key.

Google · Google Drive · Google Cloud · Microsoft · OneDrive · Azure · aws

GitHub · GitLab · facebook · twitter · YouTube · Dropbox

DUO · 1Password · DASHLANE · okta · KEEPER · shopify

Specifications

Supported Operating Systems	iOS, Android, Windows, Linux, macOS, Chrome OS
Certifications	FIDO,MFi,CE,FCC
Dimensions	43.5 × 13 × 5.5 mm
Weight	4.5g
Interfaces	USB-C, Lightning

Working Voltage	5.0V/3.3V
Working Current	<40mA
Working Temperature	-10°C ~ 50°C
Storage Temperature	-20°C ~ 70°C
Button	Touch Button
Indicator	Green LED